A NEW SHELTER
FOR THE
CITY OF HARRISONBURG
RALPH SAMPSON PARK
HARRISONBURG VIRGINIA

ARCHITECT:
MILLER CUPP ASSOC., ARCHITECTS, P.C.
1951-A EVELYN BYRD AVENUE
HARRISONBURG, VIRGINIA
22801
TELEPHONE: (540) 434-6044
FAX: (540) 434-1142

MECHANICAL/ELECTRICAL CONSULTANT:
MEI ENGINEERING, INC.
276 SOUTH LIBERTY STREET
HARRISONBURG, VIRGINIA
22801
TELEPHONE: (540) 432-6272

CODE COMPLIANCE:

CODE:	THE VIRGINIA CONSTRUCTION CODE (2009 EDITION), IBC/2009
OCCUPANCY:	USE GROUP U
CONSTRUCTION CLASSIFICATION:	TYPE VB (COMBUSTIBLE, UNPROTECTED)
BUILDING LIMITS:	USE GROUP U: 40' HEIGHT, 1 STORY, 5,500 S.F. PER IBC TABLE 503
ACTUAL BUILDING:	14' HEIGHT, 1 STORY, 1,728 S.F.
SPRINKLER SYSTEM:	NOT REQUIRED PER IBC 903
ALARM SYSTEM:	NOT REQUIRED PER IBC 907.
FIRE SEPARATIONS:	NONE REQUIRED
ENERGY CODE (IECC):	NOT APPLICABLE

OCCUPANT LOADS:	AREA	OCCUPANTS
USE GROUP U	16 TABLES @ 8 EACH	128

ACCESSIBILITY FOR DISABLED PERSONS REQUIRED PER IBC 1103

SITE LOCATION:

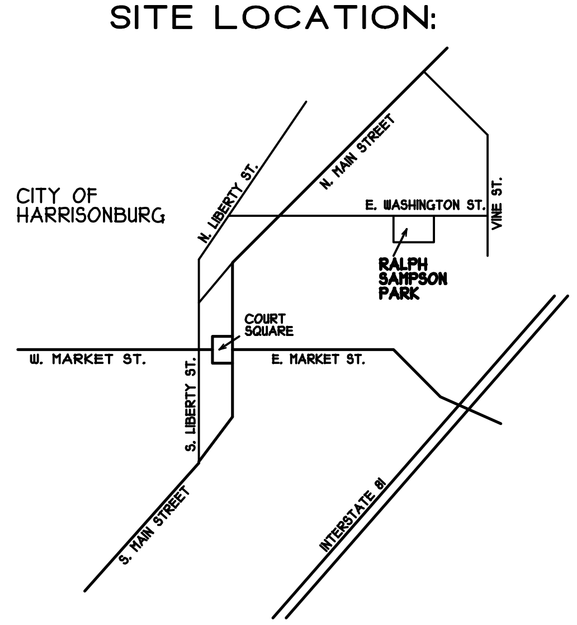

TABLE OF CONTENTS:

PROJECT COVER SHEET, CODE COMPLIANCE, CONTENTS	SHEET G-101
SITE PLAN	SHEET C-101
FLOOR PLAN. ROOF PLAN, SECTION, SPECIFICATIONS	SHEET A-101
ELEVATIONS, CROSS SECTION. DETAILS	SHEET A-201
FOUNDATION PLAN, ROOF FRAMING PLAN, DETAILS	SHEET S-101
ELECTRICAL PLAN	SHEET E-101

SET. NO.

TYPICAL ABBREVIATIONS

AB	ANCHOR BOLT
A/C	AIR CONDITIONING
ACT	ACOUSTICAL CEILING TILE
ADA	AMERICANS W/DISABILITIES ACT
ADJ	ADJACENT
AFF	ABOVE FINISH FLOOR
ALUM	ALUMINUM
ALT	ALTERNATE
APPROX	APPROXIMATE
BD	BOARD
BLDG	BUILDING
BLKG	BLOCKING
BM	BEAM, BENCHMARK
BOT	BOTTOM
BRG	BEARING
BRK	BRICK
BSMT	BASEMENT
BTWN	BETWEEN
CAB	CABINET
CB	CATCH BASIN
CER	CERAMIC
CJ	CONTROL OR CONST. JOINT
CL	CENTER LINE
CLG	CEILING
CMU	CONCRETE MASONRY UNIT
COL	COLUMN
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS
CPT	CARPET
CRS	COURSE
CT	CERAMIC TILE
DI	DROP INLET
DIA	DIAMETER
DIM	DIMENSION
DN	DOWN
DS	DOWNSPOUT
DWG	DRAWING
EJ	EXPANSION JOINT
EJC	EXPANSION JOINT COVER
EL	ELEVATION
ELEC	ELECTRICAL
EQUIP	EQUIPMENT
EQUIV	EQUIVALENT
EW	EACH WAY
EWC	ELECTRIC WATER COOLER
EXST	EXISTING
EXP	EXPANSION
EXT	EXTERIOR
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FIN	FINISH
FLR	FLOOR
FT	FOOT, FEET
FTG	FOOTING
FDN	FOUNDATION
GA	GAUGE, GYPSUM ASSOCIATION
GALV	GALVANIZED
GB	GYPSUM BOARD
GBT	GYPSUM BOARD TILE
GC	GENERAL CONTRACTOR
GEN	GENERAL
GYP	GYPSUM
HC	HANDICAP
HDW	HARDWARE
HT	HEIGHT
HM	HOLLOW METAL
HORIZ	HORIZONTAL
ID	INSIDE DIAMETER
INSUL	INSULATION
INT	INTERIOR
INV	INVERT
IP	INLET PROTECTION
JAN	JANITOR
JST	JOIST
KO	KNOCK OUT
LAB	LABORATORY
LAV	LAVATORY
LH	LEFT HAND
LL	LIVE LOAD
MAX	MAXIMUM
MB	MOP BASIN
MECH	MECHANICAL
MFR	MANUFACTURER
MH	MANHOLE
MIN	MINIMUM
MIR	MIRROR
MISC	MISCELLANEOUS
MO	MASONRY OPENING
MTL	METAL
NIC	NOT IN CONTRACT
NO	NUMBER
NTS	NOT TO SCALE
OA	OUTSIDE AIR
OC	ON CENTER
OD	OUTSIDE DIAMETER
OH	OVERHEAD, OVERHANG
OP	OUTLET PROTECTION
OPNG	OPENING
OPP	OPPOSITE
OSB	ORIENTED STRAND BD
PL	PLATE
PLY	PLYWOOD
PR	PAIR
PT	PRESSURE TREATED
PVC	POLYVINYLCHLORIDE
RA	RETURN AIR
RCP	REINFORCED CONCRETE PIPE
RD	ROOF DRAIN
REF	REFRIGERATOR
REQ'D	REQUIRED
REV	REVISION, REVERSE
RH	RIGHT HAND
RM	ROOM
ROW	RIGHT OF WAY
RT	RUBBER TILE
SD	STORM DRAIN
SF	SQUARE FEET
SHT	SHEET
SH	SHELF
SIM	SIMILAR
SPEC	SPECIFICATION
SQ	SQUARE
S&R	SHELF & ROD
SS	STAINLESS STEEL
STD	STANDARD
STL	STEEL
TB	TACKBOARD
TEL	TELEPHONE
TEMP	TEMPERED, TEMPORARY
T&G	TONGUE & GROOVE
THK	THICK
THRES	THRESHOLD
TV	TELEVISION
TYP	TYPICAL
UL	UNDERWRITERS LABORATORIES
VCT	VINYL COMPOSITION TILE
VERT	VERTICAL
W/	WITH
WC	WATER CLOSET
WD	WOOD
WIN	WINDOW
W/O	WITHOUT
WP	WATERPROOF
WS	WEATHER STRIP
WWF	WELDED WIRE FABRIC

SYMBOLS USED



DETAIL IDENTIFICATION AND LOCATION OF DETAIL ON SHEET

SHEET WHERE DETAIL IS SHOWN

2 DOOR IDENTIFICATION SYMBOL

A WINDOW IDENTIFICATION SYMBOL

2 OPENING IDENTIFICATION SYMBOL

2 INTERIOR ELEVATION VIEW

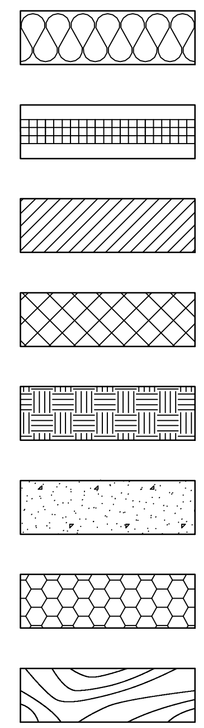

FIBERGLASS INSULATION

RIGID INSULATION

BRICK MASONRY

CONCRETE BLOCK MASONRY

EARTH

CONCRETE

CRUSHED STONE

WOOD

REVISIONS:

MILLER CUPP ASSOCIATES ARCHITECTS, P.C.
1951-A EVELYN BYRD AVENUE
HARRISONBURG, VA. 22801
PHONE (540) 434-6044
FAX (540) 434-1142

A NEW SHELTER
FOR THE
CITY OF HARRISONBURG
RALPH SAMPSON PARK
HARRISONBURG, VIRGINIA

DRAWN: MCL	CHECKED: DLC
DATE: JULY 30, 2013	CAD FILE: RalphSampsonPark.aec

DRAWING TITLE:
COVER SHEET, CONTENTS, PARTIAL SITE PLAN

COMMONWEALTH OF VIRGINIA
DALE LEE CUPP
No. 008444
ARCHITECT

PROJECT NUMBER: RalphSampsonPark

SHEET NUMBER: G-101

SHEET 1 OF 1

ATTACHMENT E

New Park Shelter ITB 2014406-PR-B